


* by using RG 213 adapter cable is needed at the AV 12

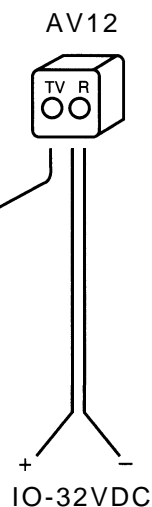

Delta 12 M

Technical data Delta 72 :

Frequency range:	40 to 900 MHz
Omnidirectional:	360°
Dimensions:	Diameter: 420 mm 16.5 inch Thickness: 55 mm 2.75 inch
Weight:	900 gram 2.25 lbs.
Connector:	N
Preamplifier	12 Vdc/35 mA
Power gain:	2 x 12 dB (24 dB)
Material:	V 4A, stainless steel (316) and P.O.M.

Technical data AV 12 V battery filter

Input voltage:	10 to 32 volt DC
Output impedance:	75 Ohm
Dimensions:	80 x 80 x 40 mm (3.25 x 3.25 x 1.50 inch)
Weight:	approx. 150 gram
Current input:	approx. 35 mA
Power gain:	12dB

Genera/ data:

Connectors:	1 x N connector 2 x IEC 169 connectors
Recommended antenna cable:	RG-58, or RG 213
Covering all channels from	2 to 80 + FM
	VHF/UHF/FM
Operating temperature:	- 25° C to + 60° C

All technical information subject to modification and improvement.
Made in Germany



Agency